

NOTICE: As of 8 April 2026, LAHD 500 has been discontinued

Automatic adjustment for optimal oil lubrication level

Oil leveller LAHD series


SKF Oil Levellers, ~~LAHD 500~~ and LAHD 1000, are designed for automatic adjustment of the optimal oil lubrication level within a bearing housing, gear box, crank case or similar oil bath lubrication application. Not usually possible, SKF Oil Levellers allow you to effectively adjust the correct oil level during running conditions. Optimising machine performance and increasing the service life of the applications. Furthermore, they automatically compensate for oil leakage and offer the possibility of visual inspection of the oil level.

How it works

The SKF Oil Leveller consists of two communicating oil reservoirs. The lower reservoir is in direct contact with the application and hence its oil level is the same as the oil level inside the application. Through a ventilation hole, the lower reservoir is also in direct contact with the ambient air. The upper reservoir is an airtight container storing replacement oil. Through its extended neck, which dips into the oil of the lower reservoir, the two reservoirs are in direct contact with each other.

However, oil can only flow from the upper to the lower reservoir once the oil level in the lower reservoir goes below the pre-set level, allowing air to flow through the extended neck to the upper reservoir.

- Optimally maintained oil level provides adequate lubrication
- Easy visual inspection
- Extended re-lubrication intervals. LAHD 1000 compensates for evaporation losses of up to 1 litre of lubricating oil!
- Oil must be refilled manually

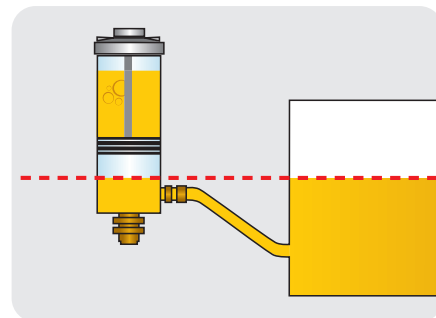

Technical data

Designation ~~LAHD 500~~ / LAHD 1000

Reservoir volume

– ~~LAHD 500~~ 500 ml (17 US fl. oz.)
– LAHD 1000 1 000 ml (34 US fl. oz.)

Boundary dimensions

– ~~LAHD 500~~ ~~Ø 91 × 290 mm high (Ø 3.6 × 11.4 in.)~~
– LAHD 1000 Ø 122 × 290 mm high (Ø 4.8 × 11.4 in.)

Allowed temperature range –20 to +70 °C (–5 to +158 °F)

Length of connecting tube 600 mm (23.5 in.)

Connection thread G1/2

Suitable oil types Mineral and synthetic oils

Container material Polycarbonate / aluminium

Tube material Polyurethane



® SKF is a registered trademark of the SKF Group.

© SKF Group 2011

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB MP/P8 12408 EN · December 2011

