


R10-F

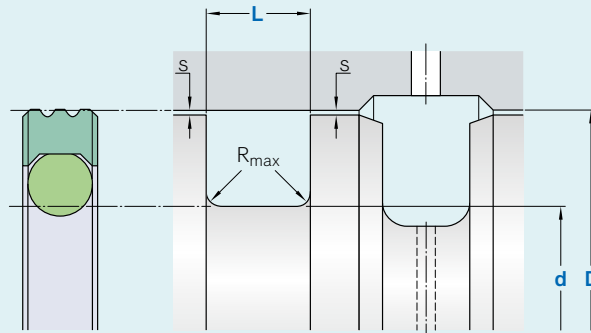

Ordering dimensions in **blue**

Surface roughness R_{tmax}	R_a
μm	

Sliding surface	≤ 2	0,05–0,2
Bottom of groove	$\leq 6,3$	$\leq 1,6$
Groove face	≤ 15	≤ 3

Hardness: On the surface min 55 HRC, hardened depth > 0,3 mm.
 Bearing area: 50–95% and a cutting depth of 0,5 R_z based on $C_{ref} = 0\%$

Standard dimensions					Maximal radial extrusion gap s^*		
D H8 over	d h8 incl.	L + 0,2	R		100 bar	200 bar	350 bar
mm					mm		
10	19	D – 4,9	2,2	0,3	0,15	0,10	0,10
19	38	D – 7,5	3,2	0,5	0,20	0,15	0,10
38	200	D – 11	4,2	0,7	0,25	0,20	0,10
200	256	D – 15,5	6,3	1,2	0,30	0,25	0,10
256	650	D – 21	8,1	1,5	0,30	0,25	0,15
650	1000	D – 28	9,5	2,0	0,45	0,30	0,20

* Extrusion gap values shown above are valid for a temperature of 80 °C, higher temperatures require lower values.

Ordering example

Profile
 D x d x L [mm]
 Sealing material / Energizer

Rotary seal R10-F
 100 x 89 x 4,2
 SKF Ecoflon 4 / NBR 70

R10-F

Operating parameters

Material Seal	Energizer	Temperature		Speed ¹⁾	Pressure ²⁾
		from	to	max	max
		°C		m/s	bar (MPa)
■ SKF Ecoflon 4	NBR 70	-30	+100	0,4	350 (35)
■ SKF Ecoflon 4	FPM 75	-20	+200	0,4	350 (35)

IMPORTANT NOTE: The stated operating conditions represent general indications. It is recommended not to use all maximum values simultaneously.

¹⁾ Surface speed limit values are valid only in the presence of a lubrication film.

²⁾ Pressure ratings depend on the size of the extrusion gap.



skf.com | skf.com/seals

© SKF is a registered trademark of the SKF Group.

© SKF Group 2024. All rights reserved. Please note that this publication may not be copied or distributed, in whole or in part, unless prior written permission is granted.

Every care has been taken to ensure the accuracy of the information contained in this publication, but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB SE/P8 11881/3 EN · August 2024