

TR/3/M/P/PTV

The TR/3/M/P/PTV seal is a rotary shaft seal based on the TR/3/M design with an additional dust lip, sufficiently robust to prevent foreign bodies penetration into the sealing system and damaging the main lip. It also featuring a flexible metal band in the seal back.



Same as the TR/3/M version, it can be installed without a retainer plate. However, in extreme cases, a retainer plate might be advisable.

The TR/3/M/P/PTV seal is characterized by a particularly robust sealing lip with an exclusive antifriction band patented with number PCT/EP2006/004962.

Dimensions and tolerances are according to DIN 3760.

Lip flexibility and elasticity are identical to all other seals of the TR/3 product family.

Maximum pressure capability is 0,5 bar.

Exclusive features of TR/3/M/P/PTV seals are:

- Antifriction material vulcanized during the process according to patent PCT/EP2006/004962
- No main lip deterioration due to additional dust lip
- Possibility of assembly without retainer plate
- Improved resistance to possible shaft misalignments
- Decreased radial force exerted on shaft
- Reduced friction and consequent temperature decrease
- Protected spring to avoid slipping/popping out from groove
- Reduced spring preload
- Absence of external metallic parts and consequent prevention of damages to housing bore

Possible size range for TR/3/M/P/PTV seals: $\varnothing d_{\min} = 60 \text{ mm}$; $\varnothing D_{\max} = 2\ 350 \text{ mm}$ (please also see the drawing at the next page).

Materials

The table below shows working temperature ranges (minimum, maximum, peak (*)) applicable to each type of compound as well as possible spring configurations.

Material	Temperature		Standard spring	Special spring	Recommended circumferential shaft speed	Misalignment
	min	max				
	°C	°C (*)			m/s	
NBR	-30	+100 (+120)	Carbon steel	AISI 302	15	According to cross section
HNBR	-40	+150 (+175)	Carbon steel	AISI 302	23	
FKM	-20	+200 (+250)	AISI 302	AISI 316	30	

The PTFE compounds used for the TR/3/M/P/PTV coating design may vary depending on the applications demand. The table below shows the most used ones with the relative coefficients of friction. For more details, please contact the TENUTE Technical Department / SKF Seals Application Engineering.

Material	Coefficient of friction
PTFE Virgin	0,06
PTV / MoS ₂ (1*)	0,08
PG (2*)	0,11
PB (3*)	0,13
PB / MoS ₂ (4*)	0,13

1* ... PTFE with glass and molybdenum bisulfide

2* ... PTFE with carbon and graphite

3* ... PTFE with bronze


4* ... PTFE with bronze and molybdenum bisulfide

Assembly of TR/3/M/P/PTV seals

The drawing shows the details of the housing dimensions and the assembly of the TR/3/M/P/PTV seal in applications without pressure.

Particular applications or requirements different from those details shall be agreed with the TENUTE Technical Department / SKF Seals Application Engineering.

There are different ways of mounting the TR/3/M/P/PTV seal as shown in the drawings at the right-hand side.

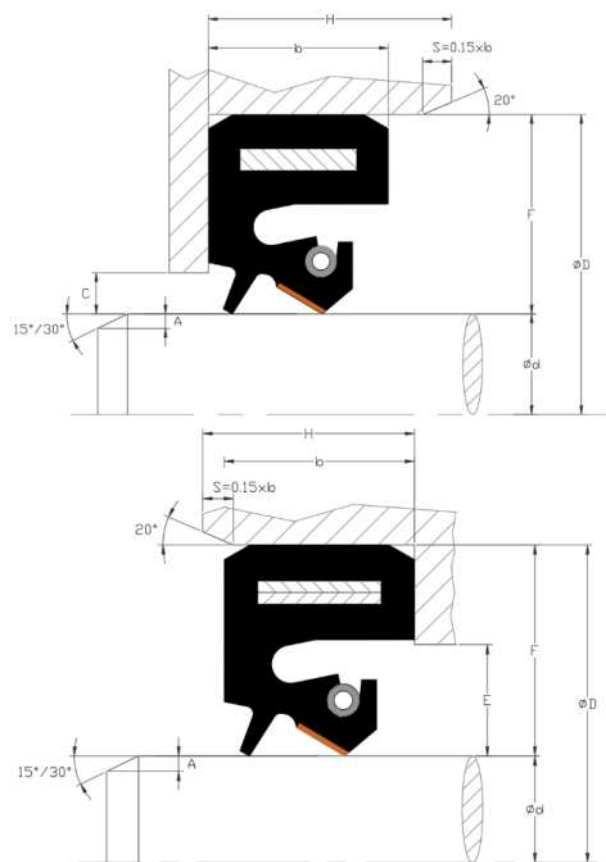

$$C_{\text{maximum}} = 0,2 \times F$$

$$E_{\text{maximum}} = 0,5 \times F$$

Shaft and housing diameter tolerance

Shaft diameter Ød		Tolerance	Housing diameter ØD		Tolerance
Over	Up to		Over	Up to	
mm	mm		mm	mm	
60	1 000	h11	80	1 600	H8
1 000	2 290	h10	1 600	2 350	+0,2 / 0

Housing height tolerance and chamfers

Housing height			Shaft chamfer			Housing chamfer
b	H	Tolerance	Ød		A minimum	S
mm	mm	mm	Over mm	Up to mm	mm	
Up to 10	b + 0,3	+0,2 / 0	60	250	3	S = 0,15 x b
Over 10	b + 0,4	+0,3 / 0	250	800	4,5	
			800	1 500	6	
			1 500	2 290	7,5	

Shaft and housing surface finishing

A roughness of Ra from 0,2 to 0,6 µm is recommended for the shaft in standard applications, while in case of high speeds, a finishing to Ra from 0,2 to 0,4 µm is recommended. Plunge grinding is required. For the housing bore a finish turning is sufficient.

Shaft hardness

Up to 15 m/s	Over 15 m/s
40 HRC	60 HRC and above
PTFE PG (2*)	PTFE PB (3*)

skf.com | skf.com/seals

© SKF and TENUITE are registered trademarks of the SKF Group
 © SKF Group 2024

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication, but no liability can be accepted for any loss or damage whether direct, indirect, or consequential arising out of the use of the information contained herein. All data mentioned in this publication are given as an indication. SKF Seals Application Engineering / TENUITE Technical Department reserves the right to change and improve its products according to application specifications and test results.